



Foshan Sparklestar Metal Co., Ltd.

## COMPANY PROFILE 公司简介

佛山市华创晋轰金属制品有限公司是集研发,生产,销售LED产品于一体的高科技企业。坐落于中国广东省佛山市南海区里水镇麻奢段麻奢圭和路26号。公司面积十万平方米,注册资本达到1千万。

目前公司有员工约800人,下设面板灯车间,T8灯管车间,T8T5支架车间,磁吸灯车间,投光灯车间等流水线约40条,一天产能约20万支。

公司有专门的质检部门对原材料,生产线,成品进行严格的质量把控。同时产品通过 ISO、CB、CE、CCC等认证。是中国国内最好最大的LED企业之一。

公司优秀的产品质量,高性价比的价格,准时的交货期以及完善的售后服务在国内外市场享有良好的信誉。产品在欧洲、南美、中东、亚洲及非洲市场受到广泛好评。

Sparkle Star Lighting, A High-tech enterprise integrating research and development, production and sales of LED Products. It is located at No. 26, Mashe Guihe Road, Mashe Section, Lishui Town, Nanhai District, Foshan, Guangdong, China. Our company covers an area of one hundred thousand square meters, with a registered capital of 10 million Yuan.

At Present, there are around 800 employees in our company, with about 40 production lines including panel light workshop, T8 tube workshop, T8&T5 fixture light workshop, magnetic track system workshop and LED flood light workshop. Our production capacity can go up to 200,000 per day.

Our Company has a special quality control department to raw materials, production lines, finished products for strict quality control. At the same time, our products pass the certification such as ISO, CB, CE, CCC and so on. It is one of the best and largest LED enterprises in China.

Our company enjoys a good reputation for excellent product quality, cost-effective price, on time delivery as well as perfect after-sales service in the domestic and foreign markets. In addition, our products are widely praised in the market of Europe, South America, the Middle East, Asia and Africa.

### 公司文化:

持续秉承着"客户至上,质量至上,服务至上"的经营理念,并且始终保持专业,诚信,创造力的态度,实现新老客户的双赢。

### Company culture:

Our company continue to uphold the customer first, quality first, service first business philosophy, and always maintain professional, integrity, creativity attitude, to achieve a win-win situation for new and old customers.

## PRODUCT CERTIFICATE DISPLAY

### 产品证书展示

















## PRODUCT CERTIFICATE DISPLAY

工厂展示















## PRODUCT CATALOG

产品目录

PAGE 01-06

B光灯系列 LED FLOOD LIGHT



PAGE O T O7-10

磁吸灯系列 MAGNETIC TRACK SYSTEM



PAGE II-22

mm fixed by the part of the p











PAGE 27

筒灯系列 LED DOWN LIGHT





PAGE **29** 

洗墙灯系列 WALL WASHER LIGHT









PAGE 3

31-32

防潮壁灯系列 MOISTURE-PROOF LED BULKHEAD LIGHT SERIES









PAGE 33

T8支架系列 LED T8 TUBE & T5支架系列 LED T5 TUBE











# PAGE 35 35-36 TB灯管系列 TUBE LIGHT SERIES







PAGE 3

净化灯系列 LED BATTEN LIGHT













**39**°

T8支架系列 FIXTURE LIGHT SERIES







41-42

GX53 SERIES DOWNLIGHT LUMINAIRE



















## LED FLOOD LIGHT SERIES

冲压铁投光灯系列

MATERIAL: IRON+GLASS+PET



投光灯	冲压铁投光	线(A <b>l</b> uminu	um Flood L	ight)	
额定功率/Rated Power	50W	100W	200W	300W	400W
实测功率/Actual Test Power	28W	50W	80W	98W	153W
产品尺寸/Products Parameters	207*171*32mm	246*201*32mm	290*223*32mm	321*270*35mm	370*300*35mm
防护等级/IP	65	65	65	65	65
显指/CRI	80	80	80	80	80
光通量/Luminous Flux	1657LM	3283LM	6009LM	8885LM	10576LM
光效/Lm/W	60LM/W	65LM/W	75LM/W	90LM/W	70LM/W
质保/Warranty	2 years	2 years	2 years	2 years	2 years

## LED FLOOD LIGHT SERIES

冲压铁投光灯系列

MATERIAL: IRON+GLASS+PET



投光灯	冲压铁投光灯	冲压铁投光灯(Iron Flood Light)				
额定功率/Rated Power	50W	100W	200W	300W		
实测功率/Actual Test Power	40W	70W	130W	190W		
产品尺寸/Products Parameters	230*185*32mm	282*215*32mm	380*285*32mm	485*355*43mm		
防护等级/IP	65	65	65	65		
显指/CRI	70	70	70	70		
光通量/Luminous Flux	4000LM	6500LM	12000LM	21000LM		
光效/Lm/W	100LM/W	95LM/W	95LM/W	110LM/W		
质保/Warranty	2 years	2 years	2 years	2 years		

## LED FLOOD LIGHT SERIES

压铸铝投光灯系列

MATERIAL: ALUMINUM+PC+PET



投光灯	压铸铝投	光灯(Alum	inum Floo	d Light)		
额定功率/Rated Power	50W	100W	150W	200W	300W	400W
实测功率/Actual Test Power	50W	100W	150W	180W	270W	360W
品尺寸/Products Parameters	182*190*30mm	230*245*30mm	270*285*30mm	320*340*40mm	365*385*45mm	400*425*50mm
防护等级/IP	65	65	65	65	65	65
显指/CRI	80	80	80	80	80	80
光效/Lm/W	98LM/W	97LM/W	98LM/W	88LM/W	83LM/W	91LM/W
质保/Warranty	2 years					

## LED FLOOD LIGHT **SERIES**

压铸铝投光灯系列

MATERIAL: ALUMINUM+PC+PET



投光灯	压铸铝投光灯	ፓ(Aluminun	n Flood Ligh	nt)	
额定功率/Rated Power	50W	100W	200W	300W	400W
实测功率/Actual Test Power	50W	100W	150W	190W	290W
产品尺寸/Products Parameters	160*205*25.5mm	210*270*25mm	248*329*25mm	280*378*25mm	425*315*27m
防护等级/IP	65	65	65	65	65
显指/CRI	80	80	80	80	80
光通量/Luminous Flux	5000LM	9500LM	13000LM	15000LM	24000LM
光效/Lm/W	100LM/W	90LM/W	90LM/W	85LM/W	80LM/W
质保/Warranty	2 years	2 years	2 years	2 years	2 years



























## **ALUMINUM FLOOD LIGHT** SERIES

压铸铝投光灯系列

MATERIAL: IRON+GLASS+PET



投光灯	压铸铝投	光灯(Alum	inum Floo	d Light)		
额定功率/Rated Power	50W	100W	150W	200W	300W	400W
实测功率/Actual Test Power	50W	103W	154W	198W	303W	347W
产品尺寸/Products Parameters	165*180*23mm	218*238*23mm	270*296*25mm	305*337*25mm	345*380*30mm	390*425*32mm
防护等级/IP	65	65	65	65	65	65
显指/CRI	80	80	80	80	80	80
光通量/Luminous Flux	9976LM	15538LM	22870LM	38953LM	58730LM	60793LM
光效/Lm/W	200LM/W	150LM/W	154LM/W	194LM/W	193LM/W	175LM/W
质保/Warranty	2 years					

## **ALUMINUM FLOOD LIGHT** SERIES

飞碟投光灯系列

MATERIAL: ALUMINUM+PC+PET



投光灯	压铸铝投光灯(Aluminum Flood Light)						
额定功率/Rated Power	100W	150W	200W				
实测功率/Actual Test Power	98W	143W	194W				
产品尺寸/Products Parameters	Ф238*23mm	Ф298*25mm	Ф332*25mm				
防护等级/IP	65	65	65				
显指/CRI	80	80	80				
光通量/Luminous Flux	10422LM	16615LM	19839LM				
光效/Lm/W	105LM/W	115LM/W	102LM/W				
质保/Warranty	2 years	2 years	2 years				

## LED STREETLIGHT SERIES

路灯系列

MATERIAL: ALUMINUM+PC+PET



投光灯	投光灯 压铸铝投光灯(Aluminum Flood Light)						
额定功率/Rated Power	50W	100W	150W	200W			
实测功率/Actual Test Power	52W	98W	146W	200W			
产品尺寸/Products Parameters	390*57*23mm	465*197*23mm	525*217*25mm	595*246*25mm			
防护等级/IP	65	65	65	65			
显指/CRI	80	80	80	80			
光通量/Luminous Flux	6153LM	14626LM	16654LM	20635LM			
光效/Lm/W	118LM/W	149LM/W	113LM/W	102LM/W			
质保/Warranty	2 years	2 years	2 years	2 years			

## LED STREETLIGHT SERIES

路灯系列

MATERIAL: ALUMINUM+PC+PET



<del>+</del> Љ \/	にたまたロナルハノル	T/					
投光灯	压铸铝投光灯(Aluminum Flood Light)						
额定功率/Rated Power	50W	100W	150W	200W			
实测功率/Actual Test Power	50W	99W	151W	198W			
产品尺寸/Products Parameters	306*132*41mm	367*147*41mm	422*168*41mm	503*197*41mm			
防护等级/IP	65	65	65	65			
显指/CRI	80	80	80	80			
光通量/Luminous Flux	6065LM	22495LM	19645LM	24472LM			
光效/Lm/W	120LM/W	227LM/W	130LM/W	123LM/W			
质保/Warranty	2 years	2 years	2 years	2 years			





































ULTRA THIN MAGNETIC TRACK SYSTEM SERIES

磁吸灯系列

MATERIAL: ALUMINUM+PP/PC



磁吸灯	磁吸格栅灯(Magi	netic Grille Light)	
功率/Power	6W	12W	18W
产品尺寸/Out Size	190*30*16mm	310*30*16mm	430*30*16mm
色温 / CCT	3000K 4000K 6000	K	
灯体颜色/Housing Color	砂黑Sand black		




### 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

磁吸灯	磁吸泛光灯(Magnetic Flood Light)					
功率/Power	12W	18W	24W			
产品尺寸/Out Size	310*30*16mm	430*30*16mm	550*30*16mm			
色温 / CCT	3000K 4000K 6000	K				
灯体颜色/Housing Color	砂黑Sand black					



### 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

8	兹吸灯	磁吸格	磁吸格栅灯(Magnetic Grille Light)						
功	]率/Power	6W		12	2W	18W			
产品)	尺寸/Out Size	170*30*	24mm	29	90*30*24mm	410*30*24	4mm		
É	色温 / CCT	3000K	4000K	6000K					
灯体颜色	∄/Housing Color	砂黑San	d black						




	磁吸灯	磁吸轨道灯(Magnetic Track Light)					
٧	功率/Power	6W	12W	18W			
	产品尺寸/Out Size	105*10*55mm	105*12*55mm	115*145*65mm			
	色温 / CCT	3000K 4000K 6000	OK				
1	灯体颜色/Housing Color	砂黑Sand black					

















## 20MM MAGNETIC TRACK SYSTEM SERIES

磁吸灯系列

MATERIAL: ALUMINUM+PP/PC



4657 C DAL. 710100 21	34/100 2034/03 2034 30/00/12							
磁吸灯	磁吸格栅灯(Mag	netic Grille Light)						
产品型号/Model	GS-6T	GS-12T	GS-18T	GS-24T				
功率/Power	6W	12W	18W	24W				
产品尺寸/Out Size	110*22*25mm	220*22*25mm	330*22*25mm	440*22*25mm				
色温 / CCT	3000K 4000K 600	OK						
灯体颜色/Housing Color	砂黑Sand black							



磁吸灯	磁吸泛光灯(Ma	gnetic Flood Light	)	
产品型号/Model	FG-300	FG-600	FG-900	FG-1200
功率/Power	12W	24W	36W	48W
产品尺寸/Out Size	300*22*25mm	600*22*25mm	900*22*25mm	1200*22*25mm
色温 / CCT	3000K 4000K 60	00K		
灯体颜色/Housing Color	砂黑Sand black			



### 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

		•	
磁吸灯	磁吸折叠灯(Mag	t)	
产品型号/Model	ZDGS-6T	ZDGS-12T	ZDGS-18T
功率/Power	6W	12W	18W
产品尺寸/Out Size	112*22*110mm	220*22*110mm	330*22*110mm
色温 / CCT	3000K 4000K 6000	OK	
灯体颜色/Housing Color	砂黑Sand black		



710	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	03 1/100 203 1/03 203 1 30/00112	
	磁吸灯	磁吸轨道灯(Magnetic Tro	ack Light)
	产品型号/Model GD-12		GD-24
	功率/Power	12W	24W
ı	产品尺寸/Out Size	110*50mm	150*60mm
	色温 / CCT	3000K 4000K 6000K	
×	灯体颜色/Housing Color	砂黑Sand black	





















压铸铝面板灯系列

MATERIAL: ALUMINUM+GLASS+PS



可及とM. 一般自3000K 自然自4000K 企正自300K 相が不足。 ACI03 203 V 100								
面板灯	压铸造铝面板灯(Slim Round)							
产品型号/Model	PACB-LR03	PACB-LR06	PACB-LR09	PACB-LR12	PACB-LR15	PACB-LR18	PACB-LR24	
功率/Power	3W	6W	9W	12W	15W	18W	24W	
规格/Inch	2.5 "	3.5 "	4 "	5 "	6 "	8 "	12 "	
产品尺寸/Out Size	Ф85*18.8mm	Ф120*18.8mm	Ф145*18.8mm	Ф170*18.8mm	Ф190*18.8mm	Ф225*18.8mm	Ф300*25mm	
开孔尺寸/Cut Size	Ф70mm	Ф110mm	Ф135mm	Ф155mm	Ф175mm	Ф205mm	Ф285mm	
光效/Lm/W	50LM/W	60LM/W	65LM/W	75LM/W	75LM/W	80LM/W	80LM/W	







Ф210\*24mm

80LM/W

Ф285\*24mm

80LM/W



可选色温: 暖白3000K 自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

Ф160\*24mm

75LM/W

面板灯	压铸造铝面板灯(Surface Square)						
产品型号/Model	PACB-SS06	PACB-SS12	PACB-SS18	PACB-SS24			
功率/Power	6W	12W	18W	24W			
规格/Inch	3.5 "	5 "	8 "	12 "			
产品尺寸/Out Size	Ф120*120*32mm	Ф165*165*32mm	Ф220*220*32mm	Ф295*295*32mm			
产品尺寸/Out Size	Ф110*110*28mm	Ф160*160*28mm	Ф210*210*28mm	Ф280*280*28mm			
产品尺寸/Out Size	Ф110*110*24mm	Ф160*160*24mm	Ф210*210*24mm	Ф280*280*24mm			
光效/Lm/W	60LM/W	75LM/W	80LM/W	80LM/W			







产品尺寸/Out Size

光效/Lm/W

Ф110\*24mm

60LM/W











合金面板灯系列

MATERIAL: IRON+PS/GLASS



可选色温: 暖白30	500K 输	ì入电压: AC16	5-265V/100-2	65V/85-265V	50/60Hz		
面板灯	合金面板	灯(Slim Ro	und)				
产品型号/Model	PE-LR03	PE-LR06	PE-LR06	PE-LR12	PE-LR15	PE-LR18	PE-LR24
功率/Power	3W	6W	9W	12W	15W	18W	24W
规格/Inch	2.5 "	3.5 "	4 "	5 "	6 "	8 "	12 "
产品尺寸/Out Size	Ф87*16mm	Ф118*16mm	Ф143*16mm	Ф170*16mm	Ф192*16mm	Ф223*16mm	Ф300*16mm
开孔尺寸/Cut Size	Ф65mm	Ф95mm	Ф120mm	Ф140mm	Ф160mm	Ф190mm	Ф265mm
光效/Lm/W	50LM/W	60LM/W	65LM/W	75LM/W	75LM/W	80LM/W	80LM/W



可选色温: 暖白3000K 自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V							50/60Hz
面板灯 合金面板灯(Slim Square)							
产品型号/Model	PE-LS03	PE-LS06	PE-LS06	PE-LS12	PE-LS15	PE-LS18	PE-LS24
功率/Power	3W	6W	9W	12W	15W	18W	24W
规格/Inch	2.5 "	3.5 "	4 "	5"	6"	8 "	12 "
产品尺寸/Out Size	Ф89*89*16mm	Ф118*118*16mm	Ф146*146*16mm	Ф170*170*16mm	Ф193*193*16mm	Ф223*223*16mm	Ф300*300*16mm
开孔尺寸/Cut Size	Ф65mm	Ф95mm	Ф120mm	Ф140mm	Ф160mm	Ф190mm	Ф265mm
光效/Lm/W	50LM/W	60LM/W	65LM/W	75LM/W	75LM/W	80LM/W	80LM/W



- J. 25世紀 - 「WEI-3000K CHEI-3000K CHEI-300K								
面板灯	合金面板灯(Surface Round)							
产品型号/Model	PE-SR06	PE-SR12	PE-SR18	PE-SR24				
功率/Power	6W	12W	18W	24W				
规格/Inch	3.5 "	5 "	8 "	12 "				
产品尺寸/Out Size	Ф90*28mm	Ф142*28mm	Ф192*28mm	Ф265*28mm				
光效/Lm/W	60LM/W	75LM/W	80LM/W	80LM/W				



面板灯	合金面板灯(Sur	face Square)							
产品型号/Model	PE-SS06	PE-SS12	PE-SS18	PE-SS24					
功率/Power	6W	12W	18W	24W					
规格/Inch	3.5 "	5 "	8 "	12 "					
产品尺寸/Out Size	Ф90*90*28mm	Ф142*142*28mm	Ф192*192*28mm	Ф265*265*28mm					









光效/Lm/W







全塑系列筒灯

MATERIAL: PP+PS



可选色温: 暖白30	000K 自然白4	000K○正白6500	OK 输入电	压: AC165-265V	//100-265V/85-2	65V 50/60Hz
筒灯						
产品型号/Model	PF-R05	PF-R07	PF-R09	PF-R15	PF-R20	PF-R25
功率/Power	5W	7W	9W	15W	20W	25W
规格/Inch	2.5 "	3.5 "	4 "	5 "	8 "	12 "
产品尺寸/Out Size	Ф96*25mm	Ф117*25mm	Ф143*26mm	Ф176*26mm	Ф222*28mm	Ф295*28mm
开孔尺寸/Cut Size	Ф75-80mm	Ф90-100mm	Ф115-125mm	Ф145-155mm	Ф185-200mm	Ф265-280mm
光效/Lm/W	55LM/W	70LM/W	70LM/W	75LM/W	75LM/W	80LM/W



可选色温: 暖白30	00K 自然白4000K	○正白6500K	输入电压: AC165-26	65V/100-265V/85-2	65V 50/60Hz
筒灯	全塑筒灯(Slir	n Square)			
产品型号/Model	PG-S07	PG-S09	PG-S15	PG-S20	PG-S25
功率/Power	7W	9W	15W	20W	25W
规格/Inch	3.5 "	4 "	5 "	8 "	12 "
产品尺寸/Out Size	Ф118*118*27mm	Ф145*145*27mm	Ф176*176*28mm	Ф222*222*28mm	Ф294*294*28mm
开孔尺寸/Cut Size	Ф90-100mm	Ф115-125mm	Ф145-155mm	Ф190-200mm	Ф255-270mm
光效/Lm/W	70LM/W	70LM/W	75LM/W	75LM/W	80LM/W



可及巴血. WG-3000K CIACIO3-203V 100-203V 30/00H2						
筒灯	全塑筒灯(Surfo	ice Round)				
产品型号/Model	PH-R09	PH-R15	PH-R20	PH-R25		
功率/Power	9W	15W	20W	25W		
规格/Inch	3.5 "	5 "	8 "	12 "		
产品尺寸/Out Size	Ф145*32mm	Ф176*32mm	Ф223*32mm	Ф295*32mm		
光效/Lm/W	70LM/W	75LM/W	75LM/W	80LM/W		



可选色温: 暖白3000K 自然白4000K O正白6500K 输入电压: AC165-265V/100-265V/85-265V					
筒灯	全塑筒灯(Surface Square)				
产品型号/Model	PJ-S09	PJ-S15	PJ-S20	PJ-S25	
功率/Power	9W	15W	20W	25W	
规格/Inch	3.5 "	5 "	8 "	12 "	
产品尺寸/Out Size	Ф145*145*32mm	Ф176*176*32mm	Ф223*223*32mm	Ф295*295*32mm	
光效/Lm/W	70LM/W	75LM/W	75LM/W	80LM/W	














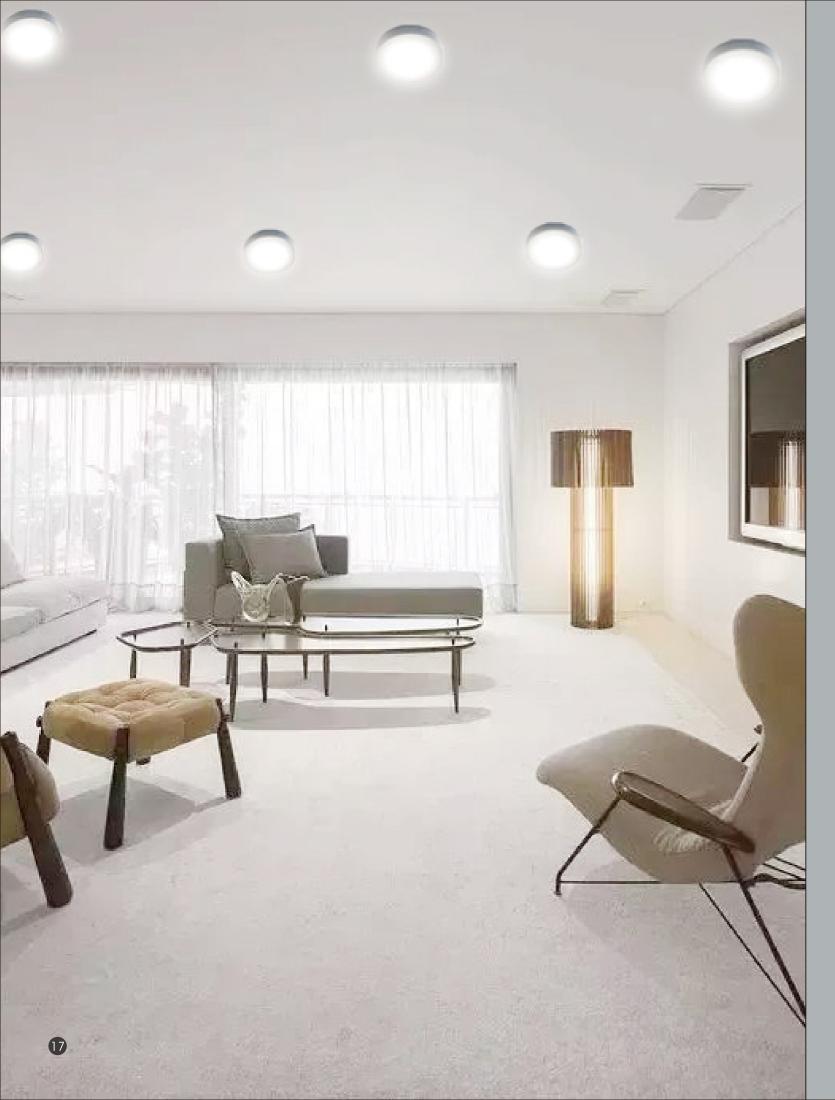

风暴款系列面板灯

MATERIAL: IRON+PP



可远巴温:			制八电压: AC105-205V/100-205V/05-205V 50/00F2				
面板灯   风暴系列面板灯(Slim Round)							
产品型号/Mo	odel	PC-R06	PC-R09	PC-R12	PC-R18	PC-R24	
功率/Pow	er er	6W	9W	12W	18W	24W	
规格/Incl	h	3.5 "	4 "	5 "	8 "	12 "	
产品尺寸/Out	t Size	Ф120*24mm	Ф145*24mm	Ф170*24mm	Ф225*24mm	Ф300*26.5mm	
开孔尺寸/Cut	t Size	Ф105mm	Ф130mm	Ф150mm	Ф205mm	Ф280mm	
光效/Lm/	W	70LM/W	70LM/W	75LM/W	75LM/W	75LM/W	



可远巴温: 吸口30	00K 日	NOTE BOSOUK	制八电压: AC105	-2057/100-2057/05-20	3 V 3U/0UHZ
面板灯	风暴系列面	扳灯(Slim Squ	uare)		
产品型号/Model	PC-S06	PC-S09	PC-S12	PC-S18	PC-S24
功率/Power	6W	9W	12W	18W	24W
规格/Inch	3.5 "	4 "	5 "	8 "	12 "
产品尺寸/Out Size	Ф120*24mm	Ф145*24mm	Ф170*24mm	Ф225*24mm	Ф300*26.5mm
开孔尺寸/Cut Size	Ф105mm	Ф130mm	Ф150mm	Ф205mm	Ф280mm
光效/Lm/W	70LM/W	70LM/W	75LM/W	75LM/W	75LM/W



可选色温: 暖白3000K ○自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz							
面板灯	风暴系列面板灯	风暴系列面板灯(Surface Round)					
产品型号/Model	PD-R06A	PD-R12A	PD-R18A	PD-R24A			
功率/Power	6W	12W	18W	24W			
规格/Inch	3.5 "	5 "	8 "	12 "			
产品尺寸/Out Size	Ф120*28mm	Ф160*28mm	Ф210*28mm	Ф280*29mm			
产品尺寸/Out Size	Ф120*32mm	Ф170*32mm	Ф225*32mm	Ф300*32mm			
光效/Lm/W	70LM/W	75LM/W	75LM/W	75LM/W			



可选色温:	暖白3000K	自然白4000K ○正白6500K	输入电压:	AC165-265V/100-265V/85-265V 50/60Hz

面板灯	风暴系列面板灯	(Surface Square)		
产品型号/Model	PD-S06A	PD-S12A	PD-S18A	PD-S24A
功率/Power	6W	12W	18W	24W
规格/Inch	3.5 "	5 "	8 "	12 "
产品尺寸/Out Size	Ф120*28mm	Ф160*28mm	Ф210*28mm	Ф280*29mm
产品尺寸/Out Size	Ф120*32mm	Ф170*32mm	Ф225*32mm	Ф300*32mm
光效/Lm/W	70LM/W	75LM/W	75LM/W	75LM/W













亚克力面板灯系列

MATERIAL: ALUMINUM+PS/GLASS



可选色温: 暖白30	00K 自然白4000K	○正白6500K \$	输入电压: AC165-265	V/100-265V/85-265V 50/60Hz
面板灯	亚克力面板灯(	Slim Round)		
产品型号/Model	PP-LR3+3	PP-LR6+3	PP-LR12+4	PP-LR18+6
功率/Power	3+3W	6+3W	12+4W	18+6W
规格/Inch	3.5 "	4 "	6 "	8 "
产品尺寸/Out Size	Ф105*10mm	Ф145*10mm	Ф195*10mm	Ф245*10mm
开孔尺寸/Cut Size	Ф75mm	Ф110mm	Ф160mm	Ф210mm
光通量/Lm	100LM	340LM	850LM	1350LM



可选色温: 暖白30	000K ○自然白4000K ○	正日6500K 输入	.电压: AC165-265V/100	0-265V/85-265V 50/60Hz		
面板灯	亚克力面板灯(S	亚克力面板灯(Slim Square)				
产品型号/Model	PP-LS3+3	PP-LS6+3	PP-LS12+4	PP-LS18+6		
功率/Power	3+3W	6+3W	12+4W	18+6W		
规格/Inch	3.5 "	4 "	6 "	8 "		
产品尺寸/Out Size	Ф105*105*10mm	Ф145*145*10mm	Ф195*195*10mm	Ф245*245*10mm		
开孔尺寸/Cut Size	Ф75*75mm	Ф110*110mm	Ф160*160mm	Ф210*210mm		
光通量/Lm	100LM	340LM	850LM	1350LM		



可及已点。								
面板灯	亚克力面板灯(Surface Round)							
产品型号/Model	PP-SR3+3	PP-SR6+3	PP-SR12+4	PP-SR18+6				
功率/Power	3+3W	6+3W	12+4W	18+6W				
规格/Inch	3.5 "	4 "	6 "	8 "				
产品尺寸/Out Size	Ф105*32mm	Ф145*32mm	Ф195*32mm	Ф245*32mm				
光通量/Lm	100LM	340LM	850LM	1350LM				



可选色温: 暖日30	00K   自然日4000K ()	止日6500K 输入	电压: AC165-265V/100	)-265V/85-265V 50/60Hz
面板灯	亚克力面板灯(S	Surface Square)		
产品型号/Model	PP-SS3+3	PP-SS6+3	PP-SS12+4	PP-SS18+6
功率/Power	3+3W	6+3W	12+4W	18+6W
规格/Inch	3.5 "	4 "	6 "	8 "
产品尺寸/Out Size	Ф105*105*32mm	Ф145*145*32mm	Ф195*195*32mm	Ф245*245*32mm
光通量/Lm	100LM	340LM	850LM	1350LM














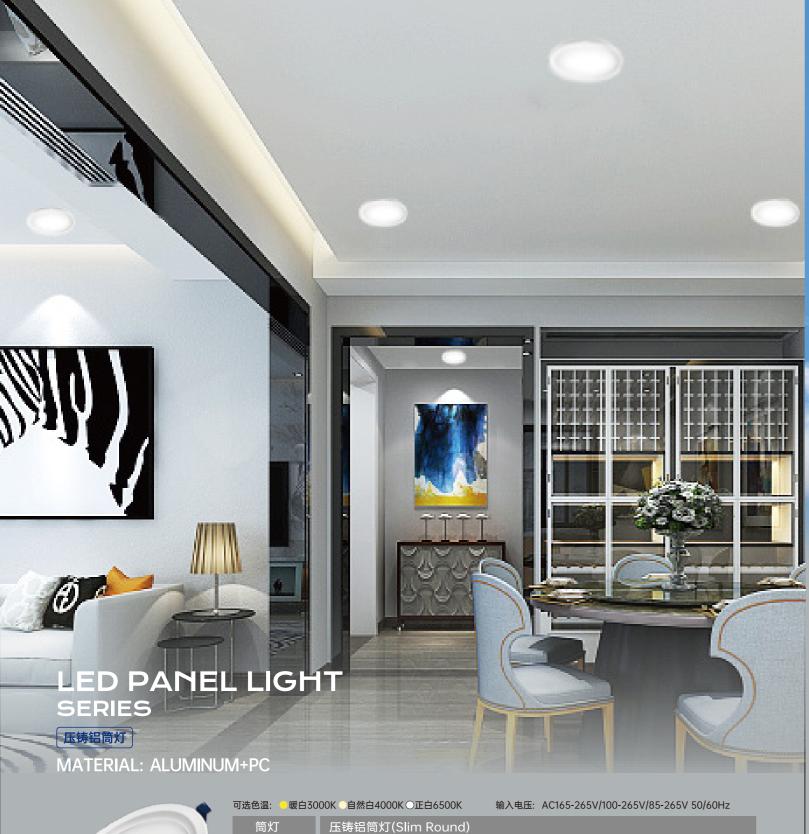



可选色温: 暖白30	3000K ○自然白4000K ○正白6500K		输入电压: AC165-265V/100-265V/85-265V 50/60Hz				
筒灯	压铸铝筒灯(Slim Round)						
产品型号/Model	DB-LR07	DB-LR12	DB-LR15	DB-LR20	DB-LR28		
功率/Power	7W	12W	15W	20W	28W		
规格/Inch	2.5 "	3.5 "	4 "	5 "	8 "		
产品尺寸/Out Size	Ф100*25mm	Ф120*25mm	Ф144*25mm	Ф170*27mm	Ф225*30mm		
开孔尺寸/Cut Size	Ф75mm	Ф95mm	Ф120mm	Ф145mm	Ф195mm		
- <b>光</b> 效/I m/W	70LM/W	80LM/W	90LM/W	901 M/W	901 M/W		



压铸铝暗装玻璃灯

MATERIAL: ALUMINUM+GLASS



玻璃灯 压铸铝玻璃灯(Slim Round)  产品型号/Model DD-LR06 DD-LR09 II  功率/Power 6W 9W	输入电压: AC165-265V/100-265V/85-265V 50/60Hz					
	玻璃灯	压铸铝玻璃灯(	Slim Round)			
	产品型号/Model	DD-LR06	DD-LR09	DD-LR12	DD-LR18	DD-LR24
	功率/Power	6W	9W	12W	18W	24W
	规格/Inch	3 "	3.5 "	5 "	8 "	12 "
	产品尺寸/Out Size	Ф96*27mm	Ф120*29mm	Ф160*29mm	Ф200*29mm	Ф240*34mm
	开孔尺寸/Cut Size	Ф75mm	Ф100mm	Ф125mm	Ф170mm	Ф210mm
	光通量/Lm	330LM	540LM	850LM	1300LM	1700LM



可选色温: 碳日3000K □目然日4000K ○止日6500K		输入电压: AC165-265V/100-265V/85-265V 50/60Hz				
玻璃灯 压铸铝玻璃灯(Slim Square)						
	产品型号/Model	DD-LS06	DD-LS09	DD-LS12	DD-LS18	DD-LS24
	功率/Power	6W	9W	12W	18W	24W
ı	规格/Inch	3 "	3.5 "	5 "	8 "	12 "
	产品尺寸/Out Size	Ф96*96*27mm	Ф120*120*29mm	Ф160*160*29mm	Ф200*200*29mm	Ф240*240*34mm
ı	开孔尺寸/Cut Size	Ф75*75mm	Ф100*100mm	Ф125*125mm	Ф170*170mm	Ф210*210mm
	光通量/Lm	330LM	540LM	850LM	1300LM	1700LM

































# FRAMELESS PANEL LIGHT SERIES

可调玉蝶灯系列

MATERIAL: ALUMINUM/IRON+PP



可选色温: 暖白3000K ○自然白4000K ○正白6500K			输入电压: AC165-265V/100-265V/85-265V 50/60Hz		
玉蝶灯	可调玉蝶灯(Sl	lim Round)			
产品型号/Model	PBCB-LR09	PBCB-LR18	PBCB-LR24	PBCB-LR36	PBCB-LR48
功率/Power	9W	18W	24W	36W	48W
规格/Inch	3 "	3.5 "	5 "	8 "	12 "
产品尺寸/Out Size	Ф100*21mm	Ф120*21mm	Ф168*21mm	Ф221*21mm	Ф300*21mm
开孔尺寸/Cut Size	Ф55-70mm	Ф55-90mm	Ф55-135mm	Ф55-185mm	Ф55-250mm
光效/Lm/W	95LM/W	95LM/W	95LM/W	100LM/W	100LM/W



可是巴迪. 暖日300000 日然日400000 ①正日630000		制八电压. AC103-7	2037/100-2037/03-2	203 / 30/00012		
玉蝶灯 可调玉蝶灯(Slim			lim Square)			
ı	产品型号/Model	PBCB-LS09	PBCB-LS18	PBCB-LS24	PBCB-LS36	PBCB-LS48
	功率/Power	9W	18W	24W	36W	48W
ı	规格/Inch	3 "	3.5 "	5 "	8 "	12 "
	产品尺寸/Out Size	Ф101*101*21mm	Ф120*120*21mm	Ф170*170*21mm	Ф222*222*21mm	Ф295*295*21mm
ı	开孔尺寸/Cut Size	Ф55-70mm	Ф55-90mm	Ф55-135mm	Ф55-185mm	Ф55-250mm
L	光效/Lm/W	95LM/W	95LM/W	95LM/W	100LM/W	100LM/W



温: 暖白30	00K □目然日4000K ○	正日6500K 输,	入电压: AC165-265V/1	00-265V/85-265V 50/60Hz
玉蝶灯	可调玉蝶灯(Sur	face Round)		
型号/Model	PACB-SR18	PACB-SR24	PACB-SR36	PACB-SR48
率/Power	18W	24W	36W	48W
见格/Inch	3.5 "	5 "	8 "	12 "
₹寸/Out Size	Ф120*42mm	Ф167*42mm	Ф220*42mm	Ф300*42mm
效/Lm/W	95LM/W	95LM/W	100LM/W	100LM/W
7	토蝶灯 型号/Model 率/Power 과格/Inch 당/Out Size	正蝶灯 可调玉蝶灯(Sun 型号/Model PACB-SR18 率/Power 18W 3.5 " セオ/Out Size 中120*42mm	正蝶灯 可调玉蝶灯(Surface Round)  型号/Model PACB-SR18 PACB-SR24  章/Power 18W 24W  現格/Inch 3.5 " 5 "  マブ/Out Size 中120*42mm 中167*42mm	正蝶灯 可调玉蝶灯(Surface Round) 型号/Model PACB-SR18 PACB-SR24 PACB-SR36 率/Power 18W 24W 36W 現格/Inch 3.5 " 5 " 8 " せづ/Out Size 中120*42mm 中167*42mm 中220*42mm



可选色温: 暖白3000K 自然白4000K O正白6500K		输入电压:	AC165-265V/100-265V/85-265V 50/60Hz
玉蝶灯   可调玉蝶灯(Surface Squa		)	

玉蝶灯	可调玉蝶灯(Surface Square)			
产品型号/Model	PACB-SS18	PACB-SS24	PACB-SS36	PACB-SS48
功率/Power	18W	24W	36W	48W
规格/Inch	3.5 "	5 "	8 "	12 "
产品尺寸/Out Size	Ф120*120*42mm	Ф169*169*42mm	Ф222*222*42mm	Ф300*300*42mm
光效/Lm/W	95LM/W	95LM/W	100LM/W	100LM/W

















## FRAMELESS PANEL LIGHT SERIES

压铸双色玉蝶灯系列

MATERIAL: ALUMINUM+PC



可选色温: 暖白3000K 自然白4000K O正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

双色玉蝶灯	压铸双色玉蝶灯(Slim Round)			
功率/Power	9W	18W	24W	36W
产品尺寸/Out Size	Ф90*40mm	Ф120*41.5mm	Ф170*42.5mm	Ф220*44.5mm
开孔尺寸/Cut Size	Ф68mm	Ф65-80mm	Ф65-130mm	Ф65-185mm
电压/Voltage	AC100-265	AC100-265	AC100-265	AC100-265
光效/Lm/W	65LM/W	70LM/W	80LM/W	80LM/W



可选色温: 暖白3000K 自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

双色玉蝶灯	压铸双色玉蝶灯(Surface Round)			
功率/Power	18W	24W	36W	
产品尺寸/Out Size	Ф120*42mm	Ф170*42mm	Ф225*42mm	
电压/Voltage	AC100-265	AC100-265	AC100-265	
光效/Lm/W	70LM/W	80LM/W	80LM/W	















黑金系列筒灯

MATERIAL: IRON+PC+PS



可选色温: 暖白3000K 自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz





筒灯
产品型号/Model
功率/Power
规格/Inch
产品尺寸/Out Size
开孔尺寸/Cut Size
光效/Lm/W

	黑金筒灯(Slim	Round)		
ı	DH-LR7WB	DH-LR7W	DH-LR9W	DH-LR12W
	7W(双色)	7W	9W	12W
i	2.5 "	2.5 "	3.5 "	4 "
	Ф90*34mm	Ф90*34mm	Ф105*35mm	Ф130*35mm
ı	Ф75mm	Φ75mm	Ф85mm	Ф110mm
	50LM/W	60LM/W	60LM/W	65LM/W
	95			9.00









筒灯
产品型号/Model
功率/Power
规格/Inch
产品尺寸/Out Size
开孔尺寸/Cut Size
光通量/Lm

合金深防眩筒灯(Slim Rou	nd)
DG-LR07	DG-LR09
7W	9W
2.5 "	3 "
Ф95*38mm	Ф115*46mm
Ф85mm	Ф105mm
230LM	500LM









可选色温: 暖白3000K 自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

























## WALL WASHER LIGHT SERIES

洗墙灯系列

MATERIAL: ALUMINUM/IRON/PC+PS



可选色温: 暖白3000K ○自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

洗墙灯(Wall Washer Light)						
产品型号/Model	功率/Power	规格 / Inch	产品尺寸 / Out Size	开孔尺寸 / Cut Size	光效/LM/W	面环颜色 / Color
	10W	2.5 "	85mm	75mm	65LM/W	White
DEEP ANTI-GLARE DOWNLIGHT	15W	3.5 "	105mm	95mm	75LM/W	White
	20W	4 "	130mm	115mm	80LM/W	White



可选色温: 暖白3000K 自然白4000K O正白6500K

输入电压: AC165-265V/100-265V/85-265V 50/60Hz

洗墙灯(Wall Washer Light)						
产品型号/Model	功率/Power	规格 / Inch	产品尺寸 / Out Size	开孔尺寸 / Cut Size	光效/LM/W	面环颜色 / Color
S7 WALL WASHER LIGHT	9W	2.5 "	85mm	75mm	75LM/W	White Black



可选色温: 暖白3000K 自然白4000K O正白6500K

输入电压: AC165-265V/100-265V/85-265V 50/60Hz

洗墙灯(Wall Washer Light)						
产品型号/Model	功率/Power	规格 / Inch	产品尺寸 / Out Size	开孔尺寸 / Cut Size	光效/LM/W	面环颜色 / Color
S9 WALL WASHER LIGHT	12W	2.5 "	85mm	75mm	90LM/W	White Black



可选色温: 暖白3000K 自然白4000K ○正白6500K

输入电压: AC165-265V/100-265V/85-265V 50/60Hz

















# MOISTURE-PROOF LED BULKHEAD LIGHT SERIES

防潮灯系列

MATERIAL: PP



可选色温: 暖白30						
防潮灯 防潮灯(Round)						
产品型号/Model	WB-R18	WB-R24				
功率/Power	18W	24W				
规格/Inch	5 "	8 "				
产品尺寸/Out Size	Ф166*57mm	Ф220*63mm				
开孔尺寸/Cut Size	Ф150mm	Ф205mm				
光通量/Lm	1500LM	2000LM				



可选色温: 暖白30	J选色温: 暖白3000K ○自然白4000K ○正白6500K 輸入电压: AC165-265V/100-265V/85-265V 50/60Hz					
防潮灯 防潮灯(椭圆Ellipse)						
产品型号/Model	WB-Q18	WB-Q24				
功率/Power	18W	24W				
规格/Inch	3.5 "	4 "				
产品尺寸/Out Size	Ф210*110*63mm	Ф270*146*73mm				
开孔尺寸/Cut Size	Ф105mm	Ф130mm				
光通量/Lm	1500LM	2000LM				



可选色温:						
防潮灯	防潮灯(Round)					
功率/Power	12W	18W	24W			
产品尺寸/Out Size	Ф141*47mm	Ф171*53mm	Ф218*73mm			
显指 / Ra	≥70	≥70	≥70			
功率因数 / PF	≥0.5	≥0.5	≥0.5			
防护等级 / IP	65	65	65			
光效/Lm/W	70LM/W	70LM/W	70LM/W			



可选色温:	暖白30	00K 自然白4000K ○正白6500K	输入电压:	AC165-265V/100-265V/85-265V 50/60Hz
防潮	灯	防潮灯(椭圆Ellipse)		

防潮灯	防潮灯(椭圆Ellipse)				
功率/Power	12W	18W	24W		
产品尺寸/Out Size	Ф170*71*48mm	Ф217*101*58mm	Ф270*143*78mm		
显指 / Ra	≥70	≥70	≥70		
功率因数 / PF	≥0.5	≥0.5	≥0.5		
防护等级 / IP	65	65	65		
光效/Lm/W	70LM/W	70LM/W	70LM/W		



















T8铝塑灯管	管 LED T	8 TUBE
产品型号/Model	功率/Power	电压/Voltage

产品型号/Model	功率/Power	电压/Voltage	产品尺寸/Products Parameters	光通量/Luminous Flux	光效/LM/W	显指/CRI
0.6 Meters	9W	AC165-265V	597*28*31.7mm	1000LM	90LM/W	80
1.2 Meters	18W	AC165-265V	1197*28*31.7mm	1800LM	90LM/W	80
2.4 Meters	36W	AC165-265V	2397*28*31.7mm	2400LM	90LM/W	80

### T8全塑支架 LED T8 TUBE

产品型号/Model	功率/Power	电压/Voltage	产品尺寸/Products Parameters	光通量/Luminous Flux	光效/LM/W	显指/CRI
0.6 Meters	9W	AC165-265V	593*31*30.5mm	1000LM	90LM/W	80
0.9 Meters	12W	AC165-265V	873*31*30.5mm	1200LM	90LM/W	80
1.2 Meters	18W	AC165-265V	1173*31*30.5mm	1800LM	90LM/W	80

## T8铝塑支架 LED T8 TUBE

产品型号/Model	功率/Power	电压/Voltage	产品尺寸/Products Parameters	光通量/Luminous Flux	光效/LM/W	显指/CRI
0.6 Meters	9W	AC165-265V	600*30*36mm	1000LM	90LM/W	80
0.9 Meters	12W	AC165-265V	900*30*36mm	1200LM	90LM/W	80
1.2 Meters	18W	AC165-265V	1200*30*36mm	1800LM	90LM/W	80


































## **TUBE LIGHT** SERIES

T8玻璃灯管系列

MATERIAL: GLASS+PC/PP

输入电压: AC165-265V/100-265V/85-265V 50/60Hz











可选色温:	暖白3000k	(○自然白4000K ○正白6500K
TO	/T <u>/*</u>	TOVT经/Tla a

T8灯管	T8灯管(Tube Light)						
产品型号/Model	功率/Power	产品尺寸/Products Parameters	Luminous Flux(lm)	显指 / CRI	光效/LM/W	功率因数/PF	Driver
T8-1.5-22	22W	1500mm	2200LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.5-24	24W	1500mm	2400LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.5-28	28W	1500mm	2800LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-14	14W	1200mm	1400LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-16	16W	1200mm	1600LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-18	18W	1200mm	1800LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-20	20W	1200mm	2000LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-22	22W	1200mm	2200LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-24	24W	1200mm	2400LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-26	26W	1200mm	2600LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-28	28W	1200mm	2800LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-30	30W	1200mm	3000LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-32	32W	1200mm	3200LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-40	40W	1200mm	3900LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-1.2-50	50W	1200mm	4900LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.9-10	10W	900mm	1000LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.9-12	12W	900mm	1200LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.9-15	15W	900mm	1500LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.6-8	8W	600mm	800LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.6-9	9W	600mm	900LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.6-10	10W	600mm	1000LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.6-12	12W	600mm	1200LM±5%	70/80	100LM/W	>0.5	IC Driver
T8-0.6-15	15W	600mm	1500LM±5%	70/80	100LM/W	>0.5	IC Driver













## LED BATTEN LIGHT SERIES

净化灯系列

MATERIAL: PP/PC





净化灯(LED Batten Light)					
产品型号/Model	功率/Power	产品尺寸/Products Parameters	光效/LM/W	显指/CRI	电压/Voltage
0.6 Meters Square	28W	615*72*25mm	90LM/W	70/80	165-265V
1.2 Meters Square	54W	1215*72*25mm	90LM/W	70/80	165-265V
1.2 Meters Square	100W	1215*100*25mm	90LM/W	70/80	165-265V



















## LED BATTEN LIGHT SERIES

净化灯铝型材系列

MATERIAL: ALUMINUM+PP/PC



净化灯(LED Batten Light)					
产品型号/Model	功率/Power	产品尺寸/Products Parameters	光效/LM/W	显指/CRI	
0.6 Meters Curve	18W	603*72*23mm	90LM/W	70/80	
1.2 Meters Curve	36W	1203*72*23mm	90LM/W	70/80	
1.5 Meters Curve	50W	1503*72*23mm	90LM/W	70/80	

输入电压: AC165-265V/100-265V/85-265V 50/60Hz

输入电压: AC165-265V/100-265V/85-265V 50/60Hz



净化灯(LED Batten Light)					
产品型号/Model	功率/Power	产品尺寸/Products Parameters	光效/LM/W	显指/CRI	
0.6 Meters Square	18W	603*65*27mm	90LM/W	70/80	
1.2 Meters Square	36W	1203*65*27mm	90LM/W	70/80	






净化灯(LED Batten Light)							
产品型号/Model	功率/Power	产品尺寸/Products Parameters	光效/LM/W	显指/CRI			
0.6 Meters Square	18W	603*65*27mm	90LM/W	70/80			
1.2 Meters Square	36W	1203*65*27mm	90LM/W	70/80			

















T8支架系列

MATERIAL: IRON



支架	T8支架(IRON)		
产品型号/Model	产品尺寸/Products Parameters	材质/Material	描述/Description
XE-06	630*33*29mm	IRON	Wire from side/Wire from bottom
XE-12	1239*33*29mm	IRON	Wire from side/Wire from bottom
XF-06	630*34*21mm	IRON	Wire from side/Wire from bottom
XF-12	1239*34*21mm	IRON	Wire from side/Wire from bottom
XG-06	630*34*14mm	IRON	Wire from side/Wire from bottom
XG-12	1239*34*14mm	IRON	Wire from side/Wire from bottom



0

T8支架系列

MATERIAL: IRON



支架	T8支架(IRON)		
产品型号/Model	产品尺寸/Products Parameters	材质/Material	描述/Description
XA-06	620*34*14mm	IRON	Wire from side/Wire from bottom
XA-12	1220*34*14mm	IRON	Wire from side/Wire from bottom
XB-06	620*34*14mm	IRON	Wire from side/Wire from bottom
XB-12	1220*34*14mm	IRON	Wire from side/Wire from bottom
XC-06	200*34*16mm	IRON	Wire from side/Wire from bottom
XC-12	1200*34*16mm	IRON	Wire from side/Wire from bottom
XD-06	620*31*21mm	Aluminum	Wire from side/Wire from bottom
XD-12	1220*31*21mm	Aluminum	Wire from side/Wire from bottom

































STYLE:A STYLE:B 灯体颜色: Housing colo 灯体颜色: Housing color ■黑 Black ■黑 Black □银 Silver □银 Silver ■金 Gold ■金 Gold
























GX53

MATERIAL: ALUMINUM+PC







**GX53** 

Multple styles and appearances available for attachment to the ceiling











■金 Gold













### 办公灯尖峰系列 (Economic Office Lamp) 办公灯 产品型号/Model E50-1200 E70-1200 E200-1200 E300-1200 E100-1200 E150-1200 28W 38W 56W 56W 84W 功率/Power 尺寸/Dimension 1180\*50\*35mm 1180\*70\*35mm 1180\*100\*35mm 1180\*150\*42mm 1180\*180\*42mm 1180\*280\*42mm 光效/LM/W ±10% 60-70 60-70 60-70 60-70 60-70 60-70 80 80 80 80 显指/Ra 0.5 功率因数/Pf 0.5 0.5 0.5 0.5

High Quality Office Lamp

可选色温: 暖白3000K 自然白4000K ○正白6500K 输入电压: AC165-265V/100-265V/85-265V 50/60Hz

办公灯	办公灯仰望系列 (High Quality Office Lamp)					
产品型号/Model	H50-1200	H70-1200	H100-1200	H150-1200	H200-1200	H300-1200
功率/Power	40W	40W	40W	80W	80W	120W
尺寸/Dimension	1200*50*35mm	1200*70*35mm	1200*100*35mm	1200*150*42mm	1200*200*42mm	1200*300*42mm
光效/LM/W ±10%	70-80	70-80	70-80	70-80	70-80	70-80
显指/Ra	80	80	80	80	80	80
功率因数/Pf	0.5	0.5	0.5	0.5	0.5	0.5



























## RECHARGEABLE FLOOR FAN SERIES

充电风扇灯

MATERIAL: PP



充电风扇灯	RECHARGEABLE FLOOR FAN			
型号/Model	FE-B16	FE-B18		
尺寸 Dimension	body height: 123cm mesh cover diameter: 417mm fan blade diameter: 360mm base diameter: 375mm	body height: 130cm mesh cover diameter: 510mm fan blade diameter: 430mm base diameter: 375mm		
功能 Function	discharge current: 1000mA-750mA-500mA-250mA 1300-1400 revolutions per minute when discharge current is 1000mA; control board output voltage: 14.2-14.5V, total output current: 1700-2000mA; charging current control: 700-1000mA;			
卖点 Core Selling Point				



充电风扇灯	RECHARGEABLE FLOOR FAN			
型号/Model	FE-C16	FE-C18		
尺寸 Dimension	body height: 123cm mesh cover diameter: 417mm fan blade diameter: 360mm base diameter: 375mm	body height: 130cm mesh cover diameter: 510mm fan blade diameter: 430mm base diameter: 375mm		
功能 Function	discharge current: 1000mA-750mA-500mA-250mA 1300-1400 revolutions per minute when discharge current is 1000mA; control board output voltage: 14.2-14.5V, total output current: 1700-2000mA; charging current control: 700-1000mA;	discharge current: 1200mA-800mA-600mA-300mA 1100-1200 revolutions per minute when discharge current is 1000mA; control board output voltage: 14.2-14.5V, total output current: 1700-2000mA; charging current control: 700-1000mA;		
卖点 Core Selling Point	ess. ole with AC 110-220V, wide voltage input, ovoltages, features a night light function. of for over 5 hours on a 12V 4.5AH battery, um speed.			













